

LIM360

Pablo Designs | Pablo Studio | 2012 | Imported from China

Features and Specifications

Voltage:	120/220V 60Hz
Power consumption:	7 watts
Color temperature:	3000K
Luminosity:	383 lumens
Luminaire efficacy:	54 lumens/watt
Color rendition index:	85
Rated lifespan:	50,000 hours
Bulb type:	LED
Cord length:	10 feet

Table Light

Scratch resistant aluminum base ring with wood or plastic magnetic base insert. Aluminum arm with USB charging port swivels 360 degrees. LED lights with clear lens and full range dim control. Removable cord.

Grommet Mounted Light

Surface mount grommet is 2" (51mm) high and 1" (25mm) wide and finished in satin aluminum. Aluminum arm with USB charging port swivels 360 degrees. LED lights with clear lens and full range dim control. Removable cord.

Additional Notes

LIM360 lights ship flat-packed. Minor assembly required.

All LIM360 lighting is ETL, CE, PSE, and RoHS certified.



Surfaces

Table Light

Grade A Arm and Base Trim

White Arm, Silver Base (TR-L8)
Black Arm, Black Base (TR-L13)

Grade B Arm and Base Trim

Aluminum Arm, Silver Base (TR-L10)
Aluminum Arm, Walnut Base (TR-L11)
Black Arm, Walnut Base (TR-L14)
White Arm, Walnut Base (TR-L9)

Grommet Mounted Light

Grade A Arm Trim

White (TR-L4)
Black (TR-L6)

Grade B Arm Trim

Aluminum (TR-L5)



LIM360

Pablo Designs | Pablo Studio | 2012 | Imported from China

To order, specify:

1. Product number
2. Arm and base trim color







Table Light	Number	List Price
Grade A	LL31-2210-NFLC	395.00
Grade B	LL31-2210-NFLC	395.00

To order, specify:

1. Product number
2. Arm trim color

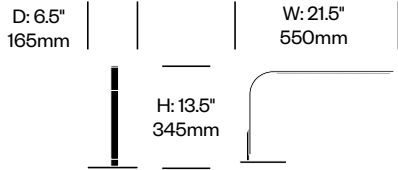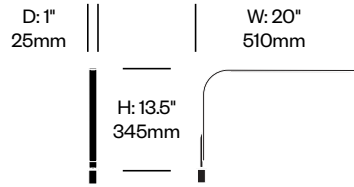

Grommet Mounted Light	Number	List Price
Grade A	LL32-2210-NGLC	385.00
Grade B	LL32-2210-NGLC	385.00