




## LIM

Pablo Designs | Ralph Reddig and Pablo Pardo | 2009


Versatile LIM lighting has a smart design that is both conceptual and eminently practical. The simple, elemental structure can be configured to suit a range of applications, whether freestanding on the floor or desk, or mounted under the surface or on panels. The minimalist form provides a space-efficient solution for today's smaller workspaces and shrinking office space.

HAWORTH® Collection


## Table Light with Pivot

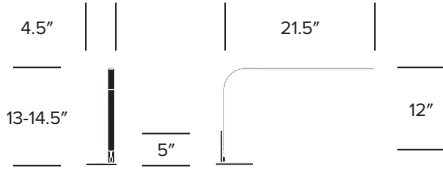


## Table Light with Block

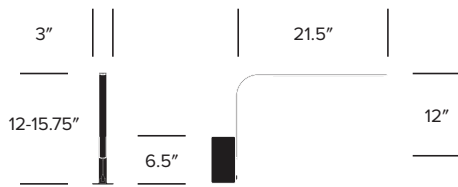

## Worksurface Mounted Light



## Floor Light

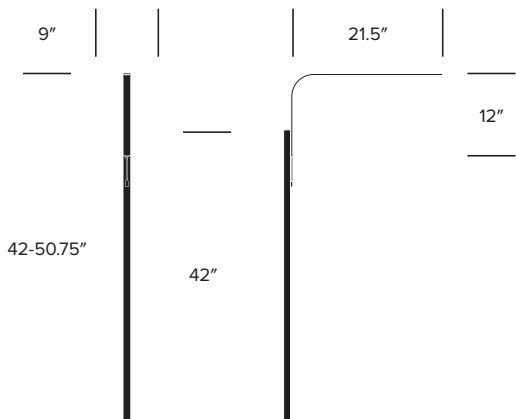

## FINISHES

### Trim Color

- Textured Black (TR-L3)
- Textured White (TR-L2)
- Brushed Aluminum (TR-L1)\*

\*Brushed Aluminum (TR-L1) not available on Worksurface Mount Bracket (LLH3-0000).

## FEATURES AND SPECIFICATIONS

Voltage:	120/220V 60Hz
Power consumption:	7 watts
Color temperature:	3,000K
Luminosity:	295 lumens
Luminaire efficacy:	41 lumens/watt
Color rendition index:	85
Rated lifespan:	50,000 hours
Bulb type:	LED
Cord length:	10 feet

LIM lights ship flat-packed. Minor assembly required.

All LIM lighting is ETL, CE, PSE, and RoHS certified and 2010 California Energy Mandate compliant. 97% of material used for LIM is recyclable.




# LIM

Pablo®

Pablo Designs | Ralph Reddig and Pablo Pardo | 2009 | Imported from China


## Slat/Rail Mounted Light

---



## Panel Mounted Light

---



## Under Shelf Proud Mounted Light

---

