

HAWORTH

# Intuity Benching

North America Price List – February 2024





**This Haworth North American price book contains US list prices.**

Canadian customers can convert the US list price into their Canadian equivalent by going to [www.Haworth.com/Canada](http://www.Haworth.com/Canada) to find the current Canadian multipliers. These multiplier factors allow you to convert the US list price into a Canadian list price.

# Price List Overview

The following overview explains how information is organized within the Intuity® Benching price list.

## 1 Front Cover

- Includes the price book title and pricing effectivity date.

## 2 Canadian Conversion / Update Page

- Pricing conversion information for converting US pricing into the equivalent Canadian pricing is located on the footer of this page.
- All Price Book updates will be listed on this page including the date, page number and description of the update.

## 3 Price List Table of Contents

- Price List table of contents with page numbers.

## 4 Statement of Line

- Provides a pictorial outline of the entire product offering.

## 5 Price List

Each price list page contains the following:

- Product Illustration
- Catalog Number
- To Order Specify – sequencing for ordering product options and finishes
- List Prices
- Product Specification Dimensions
- Features
- Specification Tips
- Class, Discount Group Number (used for discounting) and GSA information

## 6 Finishes, Fabrics and COM

- Lists information for material finishes and availability.
- Provides COM information and requirements (if applicable).

## 7 Index

- Products are listed alphabetically by alpha-numeric catalog numbers with price list page number.

## 8 Warranty Policy and Terms of Sale

- Provides information about the Haworth policy for non-obsolescence, warranty and Terms-of-Sale.

## Additional Information and Resources

Prices are subject to change without notice or approval. Haworth dealers should always submit proposals through Lynx before presenting to customers. See North American Terms of Sale for more information.


### Online Resources

#### haworth.com

- Haworth's corporate website provides access to price books and a variety of other resources and publications.

#### surfaces.haworth.com

- Website provides access to the most current fabrics and finishes offered across Haworth's various product lines.

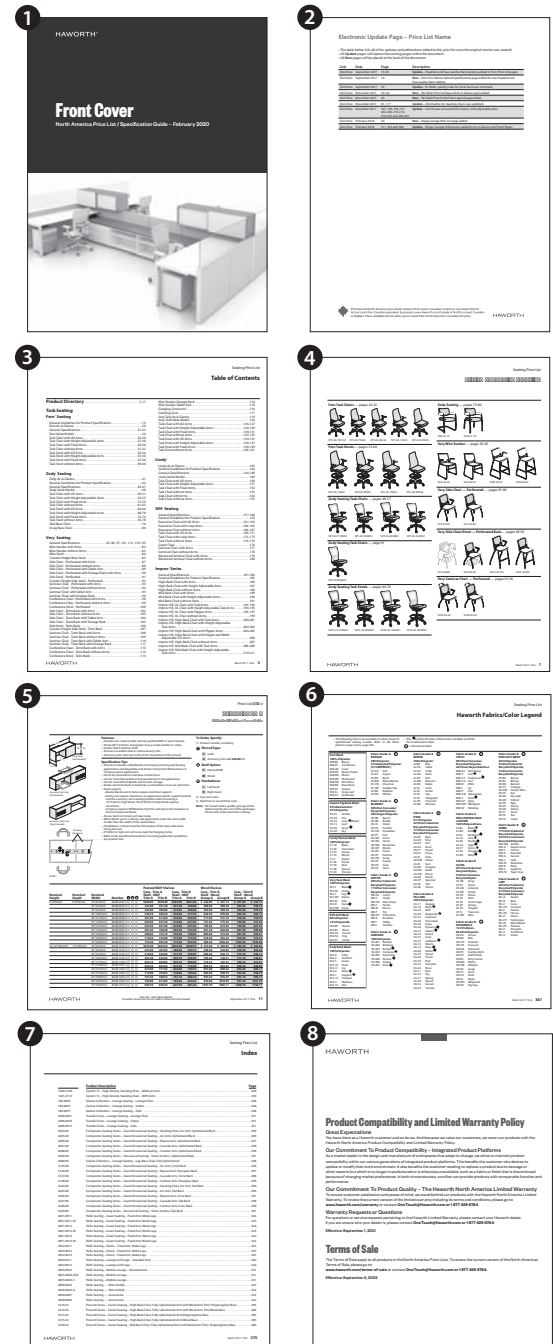

# Table of Contents

---

## Statement of Line

Statement of Line ..... 5-6

## Kits

Single Sided Starter Kit ..... 7  
 Single Sided Add-On Kit ..... 8  
 Double Sided Starter Kit ..... 9  
 Double Sided Add-On Kit ..... 10  
 120° Single Sided Starter Kit ..... 11  
 120° Double Sided Three Pack Starter Kit ..... 12  
 120° Double Sided Three Pack Add-on Kit ..... 13

## Leg Kits

Bench End Leg Kit ..... 14  
 Return Leg Kit ..... 14

## Worksurfaces

Rectangular Worksurface — No Access Hatch ..... 15  
 Rectangular Worksurface – For Use with Access Hatches ..... 16  
 Rectangular Bench End Worksurface ..... 17  
 Rectangular Return Worksurface ..... 18  
 Corner, 120° Wrap-Around ..... 19

## Accessories

Tie Plate ..... 20  
 Double-Sided Utility Tray End Covers ..... 20  
 120° Infeed Cover ..... 20  
 Access Hatch Gap Filler ..... 20  
 Accessory Rail Mounting Bracket Kit, Double Sided ..... 20

## Electrical Components

Infeed Harness ..... 21  
 Base Feed Module — Hardwire Connection ..... 21  
 Single Circuit Base Feed – Receptacle Connection with  
 Power Cord — 3-Circuit and 4-Circuit ..... 22  
 Single Circuit Base Feed – Receptacle Connection —  
 3-Circuit and 4-Circuit ..... 22  
 Base Feed Module Hardwire Connection ..... 22  
 Internal Power Base™ AI Base Feed ..... 23  
 Jumper ..... 23  
 Utility Tray Power Retrofit Kit ..... 24  
 Top Feed ..... 25  
 Triplex Receptacle – 15 Amp ..... 26  
 Triplex Receptacle – 20 Amp ..... 27  
 Top Feed — Hardwire ..... 28  
 Hardwire Kit ..... 28  
 Cover Plates ..... 28

## Electrical Accessories

Base Feed Cover — Vertical ..... 29

## Finishes and Fabrics


Finish/Color Legend ..... 30  
 Vertical Fabrics/Color Legend ..... 31

**Index** ..... 32-33


**Lifetime Product Warranty** ..... Inside Back Cover

# Statement of Line


## Kits — pages 7-13




ZBRA-2448-SIGH  
Single Sided Starter Kit —  
Straight Leg




ZBRA-2448-SAGH  
Single Sided Starter Kit —  
Angled Leg




ZBRA-2448-ATGH  
Single Sided Add-On Kit —  
Straight Leg




ZBRA-2448-ASGH  
Single Sided Add-On Kit —  
Angled Leg



ZBRA-4848-SIGH  
Double Sided Starter Kit —  
Straight Leg




ZBRA-4848-SAGH  
Double Sided Starter Kit —  
Angled Leg



ZBRA-4848-ATGH  
Double Sided Add-On Kit —  
Straight Leg




ZBRA-4848-ASGH  
Double Sided Add-On Kit —  
Angled Leg




ZBRA-4848-AFGH  
Double Sided Add-On Kit —  
Column Leg



ZBCZ-2442-SIGH  
120° Single Sided Starter Kit —  
Straight Leg




ZBCZ-2442-SAGH  
120° Single Sided Starter Kit —  
Angled Leg




ZBCZ-4842-SIGH  
120° Double Sided Three  
Pack Starter Kit —  
Straight Leg




ZBCZ-4842-SAGH  
120° Double Sided Three  
Pack Starter Kit —  
Angled Leg




ZBCZ-4842-AWGH  
120° Double Sided Three  
Pack Add-on Kit



ZBCZ-4842-AYGH  
120° Double Sided Three  
Pack Add-on Kit




ZBCZ-4842-AXGH  
120° Double Sided Three  
Pack Add-on Kit




ZBCZ-4842-AZGH  
120° Double Sided Three  
Pack Add-on Kit


## Leg Kits — page 14




ZBE2-0000-PNFG  
Bench End Leg Kit —  
Straight



ZBA2-0000-PNFG  
Bench End Leg Kit —  
Angled




ZBI2-0030-HNFG  
Return Leg Kit —  
Straight




ZBA2-0024-HRFG  
Return Leg Kit —  
Angled


## Worksurfaces — pages 15-19




WBRA-SC  
Rectangular Worksurface —  
No Access Hatch




WBRA-SS  
Rectangular Worksurface —  
For Use with Access Hatches



WBDA-SC  
Rectangular Bench End  
Worksurface




WBRB-SC  
Rectangular Return  
Worksurface




WBCZ-S  
Corner, 120° Wrap-Around

# Statement of Line


## Accessories — page 20




ZBBP-0000-PN  
Tie Plate




EUEC-0000  
Double-Sided Utility  
Tray End Covers



EBEC-0000-F  
120° Infeed Cover




ZBRA-0000-D  
Access Hatch Gap Filler




BABD  
Accessory Rail Mounting  
Bracket Kit, Double Sided


## Electrical Components — pages 21-28




EUEH-0087-3  
EUEH-0087-2  
EUEH-0087-4  
Infeed Harness




EUEB-0000-3HY  
EUEB-0000-2HY  
EUEB-0000-4HY  
Base Feed Module —  
Architectural  
Concealed  
Hardwire Connection




4TEB-20  
Single Circuit Base  
Feed – Receptacle  
Connection with  
Power Cord —  
3-Circuit and 4-Circuit



4TEB-15  
Single Circuit Base  
Feed – Receptacle  
Connection —  
3-Circuit and 4-Circuit




4TEB-1  
Base Feed Module  
Hardwire Connection




EUEJ-0064-3WF  
EUEJ-0064-2WF  
EUEJ-0064-4WF  
Internal Power Base™  
AI Base Feed




EUEJ-0024-3  
EUEJ-0024-2  
EUEJ-0024-4  
Jumper




EUEK-3S  
EUEK-2S  
EUEK-4S  
Utility Tray Power  
Retrofit Kit



EKET-C000-3S  
EKET-C000-2S  
EKET-C000-4S  
Top Feed




3 Circuit  
EUEB-153P




4 Circuit, 2+2  
EUEB-152\_

EUEB-0015  
Triplex Receptacles —  
15 AMP




3 Circuit  
EUEB-203\_



4 Circuit, 2+2  
EUEB-202\_


EUEB-0020  
Triplex Receptacles —  
20 AMP



EKET-C000-CS  
Top Feed — Hardwire




EUAP-0000-CR  
Cover Plates




EKEP-0000-C  
Hardwire Kit



EUAP-0000-CB  
Cover Plates



EUAC-0000-F  
Base Feed Cover — Vertical  
Fixed Height




EUAC-0000-A  
Base Feed Cover — Vertical  
Adjustable Height


## Electrical Accessories — page 29

# Single Sided Kits

## Single Sided Starter Kit



Straight Leg  
ZBRA-2448-SIGH



Angled Leg  
ZBRA-2448-SAGH  
(Shown with 3- or 4-circuit power and access hatches)

Depth	Width	Number				Trim	
			1	2	3	A	B
24"(610mm)	48"(1219mm)	ZBRA-2448-S	GHP	T		\$1136.52	\$1183.73
	54"(1372mm)	ZBRA-2454-S	GHP	T		1160.96	1208.17
	60"(1524mm)	ZBRA-2460-S	GHP	T		1185.40	1232.61
	66"(1676mm)	ZBRA-2466-S	GHP	T		1209.84	1257.05
	72"(1829mm)	ZBRA-2472-S	GHP	T		1234.28	1281.49
30"(762mm)	48"(1219mm)	ZBRA-3048-S	GHP	T		\$1185.36	\$1232.57
	54"(1372mm)	ZBRA-3054-S	GHP	T		1209.80	1257.01
	60"(1524mm)	ZBRA-3060-S	GHP	T		1234.24	1281.45
	66"(1676mm)	ZBRA-3066-S	GHP	T		1258.68	1305.89
	72"(1829mm)	ZBRA-3072-S	GHP	T		1283.12	1330.33

### Features

- Includes two fixed-height steel leg assemblies, support beam, rail, worksurface support brackets, and integrated below-surface utility tray.
- Available with or without the following:
  - Power distribution assembly
  - Full access hatches for back edge of worksurface
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Access hatch option includes two hinged doors that extend the full width of the surface for easy access to power distribution assembly and utility tray. The doors are 4.25"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- A Single Sided Starter Kit may be used as a stand alone desk.
- Requires Single Sided Add-On Kit(s) for an in-line single sided benching application. Leg from the Single Sided Starter Kit is repositioned to the end-of-run.
- For use with Intuity worksurface, specified separately.
  - Surface depth must match depth of the add-on kit.
  - Kit with no access hatches, option (-C) supports a rectangular worksurface.
  - Kit with access hatches, option (-S) supports a rectangular worksurface for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens and Active Components Center Screens.
- Single Sided Starter Kit is always standard with utility tray in a powered or non-powered application.
- Below worksurface power access is standard with 3-circuit, 4-circuit or hardwire power option.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of two separately specified triplex receptacles.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for **in** and **out** power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

### To Order, Specify:

1) Product number, including:

#### 1 Leg Type:

- I** Straight Leg
- A** Angled Leg

#### 2 Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

#### 3 Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add Trim A: **\$219.15** list Trim B: **\$235.44** list

- Leg color\*.
- Accent plate color\*.
- Universal rail/utility tray color\*.
- Access hatch color\* (if applicable).


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### 2 Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$179.06	\$179.06	\$179.06	\$430.74
54"	187.21	187.21	187.21	445.39
60"	195.36	195.36	195.36	460.04
66"	203.51	203.51	203.51	474.69
72"	211.66	211.66	211.66	489.34

# Single Sided Kits

	Depth	Width	Number	①	②	③	Trim A	B
<b>Single Sided Add-On Kit</b>	24"(610mm)	48"(1219mm)	ZBRA-2448-A	GHN	T		\$ 993.25	\$1032.31
		54"(1372mm)	ZBRA-2454-A	GHN	T		1017.69	1056.75
		60"(1524mm)	ZBRA-2460-A	GHN	T		1042.13	1081.19
		66"(1676mm)	ZBRA-2466-A	GHN	T		1066.57	1105.63
		72"(1829mm)	ZBRA-2472-A	GHN	T		1091.01	1130.07
	30"(762mm)	48"(1219mm)	ZBRA-3048-A	GHN	T		\$1025.80	\$1064.86
		54"(1372mm)	ZBRA-3054-A	GHN	T		1050.24	1089.30
		60"(1524mm)	ZBRA-3060-A	GHN	T		1074.68	1113.74
		66"(1676mm)	ZBRA-3066-A	GHN	T		1099.12	1138.18
		72"(1829mm)	ZBRA-3072-A	GHN	T		1123.56	1162.62



Straight Leg  
ZBRA-2448-ATGH



Angled Leg  
ZBRA-2448-ASGH  
(Shown with 3- or 4-circuit power and access hatches)

### Features

- Includes one shared, fixed-height steel leg assembly support beam, rail, worksurface support brackets, and integrated below-surface utility tray.
- Available with or without the following:
  - Power distribution assembly and power jumper
  - Full-width access hatches for back edge of worksurface
- Integrated utility tray on non-powered starter rails provides cable management and routing only.
- Attaches to a Single Sided Starter Kit, or to another Add-On Kit to extend the overall length of the bench.
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5"(13mm) leveling adjustment.
- Power distribution assembly provides locations for two separately specified triplex receptacles, providing below-surface power access at the back edge.
- A power jumper is included to connect adjacent power distribution assemblies.
- Access hatch option includes two hinged doors that extend the full width of the surface for easy access to power distribution assembly and utility tray. The doors are 4.25"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- Requires Single Sided Starter Kit for an in-line, single sided benching application. Leg from the Single Sided Starter Kit is repositioned to end of run.
- Multiple Single Sided Add-On Kits may be used with one Single Sided Starter Kit.
- For use with Intuity worksurface, specified separately.
  - Surface depth must match depth of the add-on kit.
  - Kit with no access hatches, option (-C) supports a rectangular worksurface.
  - Kit with access hatches, option (-S) supports a rectangular worksurface for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens and Active Components Center Screens.
- Single Sided Add-On Kit is always standard with utility tray in a powered or non-powered application.
- Below worksurface power access is standard with 3-circuit, 4-circuit or hardwire power option.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of two separately specified triplex receptacles.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for **in** and **out** power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

### To Order, Specify:

1) Product number, including:

#### ① Leg Type:

- T** Straight Leg
- S** Angled Leg

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit, 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

#### ③ Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add Trim A: **\$219.15** list Trim B: **\$235.44** list

2) Leg color\*.

3) Universal rail/utility tray color\*.

4) Access hatch color\* (if applicable).

**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.


#### ② Power Type

Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$179.06	\$179.06	\$179.06	\$430.74
54"	187.21	187.21	187.21	445.39
60"	195.36	195.36	195.36	460.04
66"	203.51	203.51	203.51	474.69
72"	211.66	211.66	211.66	489.34




# Double Sided Kits

## Double Sided Starter Kit



Straight Leg  
ZBRA-4848-SIGH



Angled Leg  
ZBRA-4848-SAGH  
(Shown with Utility Tray, 3- or 4-circuit power and access hatches)

Depth	Width	Number			Trim	
		1	2	3	A	B
<b>No Utility Tray</b>						
48"(1219mm)	48"(1219mm)	ZBRA-4848-S	GHPNN			\$1104.10 \$1151.31
	54"(1372mm)	ZBRA-4854-S	GHPNN			1120.39 1167.60
	60"(1524mm)	ZBRA-4860-S	GHPNN			1136.68 1183.89
	66"(1676mm)	ZBRA-4866-S	GHPNN			1152.97 1200.18
	72"(1829mm)	ZBRA-4872-S	GHPNN			1169.26 1216.47
60"(1524mm)	48"(1219mm)	ZBRA-6048-S	GHPNN			\$1152.94 \$1200.15
	54"(1372mm)	ZBRA-6054-S	GHPNN			1169.23 1216.44
	60"(1524mm)	ZBRA-6060-S	GHPNN			1185.52 1232.73
	66"(1676mm)	ZBRA-6066-S	GHPNN			1201.81 1249.02
	72"(1829mm)	ZBRA-6072-S	GHPNN			1218.10 1265.31
<b>Utility Tray</b>						
48"(1219mm)	48"(1219mm)	ZBRA-4848-S	GHP	T		\$1315.71 \$1362.92
	54"(1372mm)	ZBRA-4854-S	GHP	T		1348.29 1395.50
	60"(1524mm)	ZBRA-4860-S	GHP	T		1380.87 1428.08
	66"(1676mm)	ZBRA-4866-S	GHP	T		1413.45 1460.66
	72"(1829mm)	ZBRA-4872-S	GHP	T		1446.03 1493.24
60"(1524mm)	48"(1219mm)	ZBRA-6048-S	GHP	T		\$1364.55 \$1411.76
	54"(1372mm)	ZBRA-6054-S	GHP	T		1397.13 1444.34
	60"(1524mm)	ZBRA-6060-S	GHP	T		1429.71 1476.92
	66"(1676mm)	ZBRA-6066-S	GHP	T		1462.29 1509.50
	72"(1829mm)	ZBRA-6072-S	GHP	T		1494.87 1542.08

### Features

- Includes two fixed-height steel leg assemblies, two support beams, rail, and surface support brackets.  
Available with or without the following:
  - Power distribution assembly
  - Below-surface utility tray; standard in charcoal
  - Full-width access hatches for back edge of worksurfaces
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Power distribution assembly provides locations for four separately specified triplex receptacles (2 on each side), providing below-surface power access at the back edge of each worksurface.
- Access hatch option includes four hinged doors (two on each side) that extend the full width of the surfaces for easy access to power distribution assembly and utility tray. The doors are 4.25"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled.

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- Requires Double Sided Add-On Kit(s) for an in-line double sided benching application. Leg from the Double Sided Starter Kit is repositioned to the end-of-run.
- For use with Intuity worksurfaces, specified separately.
  - 24"(610mm)D surfaces must be used with 48"(1219mm)D Double Sided Starter Kits, and 30"(762mm)D surfaces must be used with 60"(1524mm)D Double Sided Starter Kits.
  - Kit with no access hatches, option (-C) supports rectangular worksurfaces.
  - Kit with access hatches, option (-S) supports rectangular worksurfaces for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application. Recommended if below worksurface cable management is needed.
- Below worksurface power access is standard with -3, -4 circuit or hardwire power option.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of four separately specified triplex receptacles; two per each side of Double Sided Starter Kit.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for **in** and **out** power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

### To Order, Specify:

- Product number, including:

#### 1 Leg Type:

- I** Straight Leg
- A** Angled Leg

#### 2 Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit, 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

#### 3 Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add Trim A: **\$438.30** list Trim B: **\$470.88** list

- Leg color\*.
- Accent plate color\*.
- Universal rail color\*.
- Access hatch color\* (if applicable).


\*Note: Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### 2 Power Type for Utility Tray


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$239.91	\$239.91	\$239.91	\$430.74
54"	247.46	247.46	247.46	445.39
60"	255.61	255.61	255.61	460.04
66"	263.76	263.76	263.76	474.69
72"	271.91	271.91	271.91	489.34

# Double Sided Kits


	Depth	Width	Number	①	②	③	Trim A	B	
<b>Double Sided Add-On Kit</b>	<b>No Utility Tray</b>								
	48"(1219mm)	48"(1219mm)	ZBRA-4848-A	GHNNN				\$ 859.92	\$ 898.98
		54"(1372mm)	ZBRA-4854-A	GHNNN				876.21	915.27
		60"(1524mm)	ZBRA-4860-A	GHNNN				892.50	931.56
		66"(1676mm)	ZBRA-4866-A	GHNNN				908.79	947.85
		72"(1829mm)	ZBRA-4872-A	GHNNN				925.08	964.14
	60"(1524mm)	48"(1219mm)	ZBRA-6048-A	GHNNN				\$ 892.47	\$ 931.53
		54"(1372mm)	ZBRA-6054-A	GHNNN				908.76	947.82
		60"(1524mm)	ZBRA-6060-A	GHNNN				925.05	964.11
		66"(1676mm)	ZBRA-6066-A	GHNNN				941.34	980.40
		72"(1829mm)	ZBRA-6072-A	GHNNN				957.63	996.69
	<b>Utility Tray</b>								
	48"(1219mm)	48"(1219mm)	ZBRA-4848-A	GHN	T			\$1071.53	\$1110.59
		54"(1372mm)	ZBRA-4854-A	GHN	T			1104.11	1143.17
60"(1524mm)		ZBRA-4860-A	GHN	T			1136.69	1175.75	
66"(1676mm)		ZBRA-4866-A	GHN	T			1169.27	1208.33	
72"(1829mm)		ZBRA-4872-A	GHN	T			1201.85	1240.91	
60"(1524mm)	48"(1219mm)	ZBRA-6048-A	GHN	T			\$1104.08	\$1143.14	
	54"(1372mm)	ZBRA-6054-A	GHN	T			1136.66	1175.72	
	60"(1524mm)	ZBRA-6060-A	GHN	T			1169.24	1208.30	
	66"(1676mm)	ZBRA-6066-A	GHN	T			1201.82	1240.88	
	72"(1829mm)	ZBRA-6072-A	GHN	T			1234.40	1273.46	



Straight Leg  
ZBRA-4848-ATGH



Angled Leg  
ZBRA-4848-ASGH



Column Leg  
ZBRA-4848-AFGH  
(Shown with Utility Tray, 3- or 4-circuit power and access hatches)

### Features

- Includes one shared, fixed-height steel leg assembly or column, two support beams, rail, and surface support brackets. Available with or without the following:
  - Power distribution assembly and power jumper
  - Below-surface utility tray; standard in charcoal
  - Full-width access hatches for back edge of worksurfaces
- Attaches to a Double Sided Starter Kit, or to another add-on rail to extend the overall length of the bench.
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5"(13mm) leveling adjustment.
- Column leg option provides an enclosed cavity and removable cover for routing power up from the floor. Column leg is 13"(330mm)D x 3"(76mm)W on the inside and 15.75"(400mm)D x 3.15"(80mm)W on the outside.
- Power distribution assembly provides locations for four separately specified triplex receptacles (two on each side), providing below-surface power access at the back edge of each worksurface.
- A power jumper is included to connect adjacent power distribution assemblies.
- Access hatch option includes four hinged doors (two on each side) that extend the full width of the surfaces for easy access to power distribution assembly and utility tray. The doors are 4.25"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled.

### Specification Tips

- For in-line benching applications only; not for return benching applications.
- Requires Double Sided Starter Kit for an in-line double sided benching application. Leg from the Double Sided Starter Kit is repositioned to end of run.
- Multiple Double Sided Add-On Kits may be used with one Double Sided Starter Kit.
- For use with Intuity worksurfaces, specified separately.
  - 48"(1219mm) deep kits require 24"(610mm) deep worksurfaces
  - 60"(1524mm) deep kits require 30"(762mm) deep worksurfaces
  - Kit with no access hatches, option (-C) supports rectangular worksurfaces.
  - Kit with access hatches, option (-S) supports rectangular worksurfaces for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Column Leg provides intermediate shared support, additional knee clearance, and power and cable management.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application. Recommended if below worksurface cable management is needed.
- Below worksurface power access is standard with -3, -4 circuit or hardwire power option.

### Specifications Tips, continued:

- In 3- and 4- circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of four separately specified triplex receptacles; two per each side of Double Sided Starter Kit.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

### To Order, Specify:

1) Product number, including:

#### ① Leg Type:

- T** Straight Leg
- S** Angled Leg
- F** Column Leg, add \$364.70 list

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit, 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

#### ③ Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add Trim A: \$438.30 list Trim B: \$470.98 list

- 2) Leg color\*.  
3) Universal rail color\*.  
4) Access hatch color\* (if applicable).


\*Note: Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type for Utility Tray


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$239.91	\$239.91	\$239.91	\$430.74
54"	247.46	247.46	247.46	445.39
60"	255.61	255.61	255.61	460.04
66"	263.76	263.76	263.76	474.69
72"	271.91	271.91	271.91	489.34

# 120° Single Sided Starter Kits

120° Single Sided Starter Kit	Depth	Width	Number		Trim		
			①	②	A	B	
24"(610mm)		42"(1067mm)	ZBCZ-2442-S	GHP	TC	\$2672.16	\$2699.84
		48"(1219mm)	ZBCZ-2448-S	GHP	TC	2798.01	2825.69
		54"(1372mm)	ZBCZ-2454-S	GHP	TC	2923.86	2951.54
30"(762mm)		42"(1067mm)	ZBCZ-3042-S	GHP	TC	\$3047.88	\$3075.56
		48"(1219mm)	ZBCZ-3048-S	GHP	TC	3173.73	3201.41
		54"(1372mm)	ZBCZ-3054-S	GHP	TC	3299.58	3327.26



ZBCZ-2442-SIGH



ZBCZ-2442-SAGH

### Features

- Includes two fixed-height steel leg assemblies, two support beams, one center post leg, two rails, worksurface support brackets, integrated below surface utility tray and 120° single corner cap.
- Available with or without the following:
  - Power Distribution Assemblies (2) and Flex Connector (1).
- Fixed height legs are 28”(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5”(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Field assembled.

### Specification Tips

- May be used as a stand alone desk.
- Requires Single Sided Add-On Kit(s) for an in-line single sided benching application. Leg from the 120° Single Sided Starter Kit is repositioned to the end-of-run.
- Not for use in a return benching position.
- For use with Intuity 120° worksurface; specified separately.
- Access Hatch not available on 120° kits.
- Angled legs required for knife edge worksurface option.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens or Active Components Center Screens.
- 120° Single Sided Kit is always standard with utility tray in a powered or non-powered application.
- 3-circuit, 4-circuit or hardwire power options are standard with below worksurface power access location.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of four separately specified triplex receptacles.
- Hardwire power option (-C) includes four junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

### To Order, Specify:

1) Product number, including:

#### ① Leg Type:

- I** Straight Leg
- A** Angled Leg

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

2) Leg color\*.

3) Accent plate color\*.

4) Universal rail/utility tray/120° single corner cap color\*.


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
42"	\$223.83	\$223.83	\$223.83	\$538.42
48"	240.12	240.12	240.12	567.72
54"	256.41	256.41	256.41	597.02

# 120° Double Sided Three Pack Starter Kit

## 120° Double Sided Three Pack Starter Kit



ZBCZ-4842-SIGH



ZBCZ-4842-SAGH

Depth	Width	Number		Trim	
		①	②	A	B
<b>No Utility Tray – Non-Powered</b>					
48"(1219mm)	42"(1067mm)	ZBCZ-4842-S	GHPNNC	\$3704.23	\$3731.91
	48"(1219mm)	ZBCZ-4848-S	GHPNNC	3813.79	3841.47
	54"(1372mm)	ZBCZ-4854-S	GHPNNC	3923.35	3951.03
60"(1524mm)	42"(1067mm)	ZBCZ-6042-S	GHPNNC	\$4455.67	\$4483.35
	48"(1219mm)	ZBCZ-6048-S	GHPNNC	4565.23	4592.91
	54"(1372mm)	ZBCZ-6054-S	GHPNNC	4674.79	4702.47
<b>Utility Tray</b>					
48"(1219mm)	42"(1067mm)	ZBCZ-4842-S	GHP TC	\$4049.22	\$4076.90
	48"(1219mm)	ZBCZ-4848-S	GHP TC	4207.61	4235.29
	54"(1372mm)	ZBCZ-4854-S	GHP TC	4366.00	4393.68
60"(1524mm)	42"(1067mm)	ZBCZ-6042-S	GHP TC	\$4800.66	\$4828.34
	48"(1219mm)	ZBCZ-6048-S	GHP TC	4959.05	4986.73
	54"(1372mm)	ZBCZ-6054-S	GHP TC	5117.44	5145.12

### Features

- Includes three fixed-height steel leg assemblies, three center post legs, six support beams, three rails, worksurface support brackets and 120° three-way cap.
- Available with or without the following:
  - Power Distribution Assemblies (3) and Flex Connectors (2).
  - Below-surface utility tray; standard in charcoal. Powered application always includes utility tray. Optional for non-powered application only.
- Fixed height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Field assembled.

### Specification Tips

- **For 120° applications.** May be used in the following applications:
  - Stand alone desk
  - With Double Sided Add-On Kit
  - With Double Sided 120° add-on kit
- Requires three separately specified 120° Intuity worksurfaces:
  - 48"(1219mm) deep kit require 24"(610mm) deep worksurfaces
  - 60"(1524mm) deep kit require 30"(762mm) deep worksurfaces
- Access Hatch not available on 120° kits.
- Angled legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application but recommended if below worksurface cable management is needed.
- Below worksurface utility tray is standard for 3-circuit, 4-circuit and hardwire options.
- 3- and 4-circuit or hardwire power options are standard with below worksurface power access location.
- In 3- and 4-circuit power applications the Power Distribution Assemblies (PDA) will accept a maximum of twelve separately specified triplex receptacles.
- Hardwire power option (-C) includes six junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

### To Order, Specify:

- 1) Product number, including:

#### ① Leg Type:

- I** Straight Leg
- A** Angled Leg

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

- 2) Leg color\*.

- 3) Accent plate color\*.

- 4) Universal rail/utility tray/120° three-way cap color\*.


\*Note: Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
42"	\$717.92	\$717.92	\$717.92	\$1480.02
48"	734.21	734.21	734.21	1509.32
54"	750.50	750.50	750.50	1538.62

# 120° Double Sided Three Pack Add-on Kit


## 120° Double Sided Three Pack Add-on Kit




ZBCZ-4842-AWGH



ZBCZ-4842-AYGH



ZBCZ-4842-AXGH



ZBCZ-4842-AZGH

Depth	Width	Number		Trim	
		①	②	A	B
<b>No Utility Tray – Non-Powered</b>					
48"(1219mm)	42"(1067mm)	ZBCZ-4842-A	GHPNNC	\$3312.28	\$3339.96
	48"(1219mm)	ZBCZ-4848-A	GHPNNC	3421.84	3449.52
	54"(1372mm)	ZBCZ-4854-A	GHPNNC	3531.40	3559.08
60"(1524mm)	42"(1067mm)	ZBCZ-6042-A	GHPNNC	\$4063.72	\$4091.40
	48"(1219mm)	ZBCZ-6048-A	GHPNNC	4173.28	4200.96
	54"(1372mm)	ZBCZ-6054-A	GHPNNC	4282.84	4310.52
<b>Utility Tray</b>					
48"(1219mm)	42"(1067mm)	ZBCZ-4842-A	GHP TC	\$3657.27	\$3684.95
	48"(1219mm)	ZBCZ-4848-A	GHP TC	3815.66	3843.34
	54"(1372mm)	ZBCZ-4854-A	GHP TC	3974.05	4001.73
60"(1524mm)	42"(1067mm)	ZBCZ-6042-A	GHP TC	\$4408.71	\$4436.39
	48"(1219mm)	ZBCZ-6048-A	GHP TC	4567.10	4594.78
	54"(1372mm)	ZBCZ-6054-A	GHP TC	4725.49	4753.17

### Features

- Includes one fixed-height steel leg kit, three center post legs, six support beams, three rails, worksurface support brackets and 120° three way cap.
- Fixed height leg kit includes legs for one shared condition and one end-of-run condition.
- Available with or without the following:
  - Power Distribution Assemblies (3) and Flex Connectors (3).
  - Below-surface utility tray; standard in charcoal. Powered application always includes utility tray. Optional for non-powered application only.
- Fixed height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5"(13mm) leveling adjustment.
- Column leg option provides an enclosed cavity and removable cover for routing power up from the floor. Column leg is 13"(330mm)D x 3"(76mm)W on the inside and 15.75"(400mm)D x 3.15"(80mm)W on the outside.
- A power jumper is included to connect to adjacent power distribution assembly.
- Field assembled.

### Specification Tips

- **For 120° applications.**
  - Not for stand alone applications
  - Must be used with additional kits.
- Requires Double Sided Starter Kit for benching application. Leg from Double Sided Starter Kit is repositioned to end-of-run.
- Requires three separately specified 120° Intuity worksurfaces:
  - 48"(1219mm) deep kit require 24"(610mm) deep worksurfaces
  - 60"(1524mm) deep kit require 30"(762mm) deep worksurfaces
- Access Hatch not available on 120° kits.
- Angled legs are required for Knife Edge worksurface option.
- Column leg provides intermediate shared support, additional knee clearance, and power and cable management.
- Rail features an inset channel for use with Intuity Screens, Belong Plus Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application but recommended if below worksurface cable management is needed.
- Below worksurface utility tray is standard for 3-circuit, 4-circuit and hardwire options.
- 3-circuit, 4-circuit or hardwire power options are standard with below worksurface power access location.
- In 3- and 4-circuit power applications the Power Distribution Assemblies (PDA) will accept a maximum of twelve separately specified triplex receptacles; two per each side of the 120° Double Sided Starter Kit.
- Hardwire power option (-C) includes six junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

### To Order, Specify:

- Product number, including:

#### ① Leg Kit:

- W** Shared Straight Leg and Straight Leg
- Y** Shared Angled Leg and Angled Leg
- X** Column Leg and Straight Leg, add \$325.57 list
- Z** Column Leg and Angled Leg, add \$325.57 list

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

- Leg color\*.
- Accent plate color\*.
- Universal rail/utility tray/120° three-way cap color\*.


\*Note: Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
42"	\$717.92	\$717.92	\$717.92	\$1480.02
48"	734.21	734.21	734.21	1509.32
54"	750.50	750.50	750.50	1538.62

# Leg Kits

	Description	Number	Trim	
			A	B
<b>Bench End Leg Kit</b>	Straight Leg	ZBE2-0000-PNFG	\$673.33	\$692.86
	Angled Leg	ZBA2-0000-PNFG	673.33	692.86



ZBE2-0000-PNFG



ZBA2-0000-PNFG

**Features**

- Includes two fixed-height steel legs, brackets, and attachment hardware.
- Legs are 28”(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5”(13mm) leveling adjustment.
- Field assembled.

**To Order, Specify:**

- 1) Product number.
- 2) Trim color.


**Specification Tip**

- Legs allow a bench end surface to be attached at the end of a double sided bench run.

**Return Leg Kit**

	Depth	Orientation	Number	Trim	
				A	B
<b>Straight Leg</b>	24”(610mm)	Non-Handed	ZBI2-0024-HNFG	\$445.42	\$481.24
	30”(762mm)	Non-Handed	ZBI2-0030-HNFG	510.53	546.35
<b>Angled Leg</b>	24”(610mm)	Left-Hand	ZBA2-0024-HLFG	\$445.42	\$481.24
		Right-Hand	ZBA2-0024-HRFG	445.42	481.24
	30”(762mm)	Left-Hand	ZBA2-0030-HLFG	\$510.53	\$546.35
		Right-Hand	ZBA2-0030-HRFG	510.53	546.35

ZBI2-0030-HNFG



ZBA2-0024-HRFG

**Features**

- Includes one fixed-height leg assembly, brackets, and attachment hardware.
- Leg is 28”(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 0.5”(13mm) leveling adjustment.
- Field assembled.

**To Order, Specify:**

- 1) Product number.
- 2) Leg color\*.
- 3) Accent plate color\*.

**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.


**Specification Tip**

- Allows a return worksurface to be attached to the front edge of a rectangular worksurface to create a return.
- Cannot be used in freestanding applications.

# Worksurfaces

Rectangular Worksurface — No Access Hatch

Depth	Width	Number	① ②	Laminate A		Laminate B		Laminate E		Wood Group A		Wood Group B	
				Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
24"(610mm)	48"(1219mm)	WBRA-2448-	SC	\$277.55	\$444.15	\$296.90	\$463.50	\$356.07	\$522.67	\$ 812.38	\$1017.43	\$ 915.87	\$1148.56
	54"(1372mm)	WBRA-2454-	SC	302.09	477.15	323.30	498.36	394.77	569.83	861.34	1076.71	973.47	1206.16
	60"(1524mm)	WBRA-2460-	SC	326.63	510.15	349.70	533.22	433.47	616.99	910.30	1135.99	1031.07	1263.76
	66"(1676mm)	WBRA-2466-	SC	351.17	543.15	376.10	568.08	472.17	664.15	959.26	1195.27	1088.67	1321.36
	72"(1829mm)	WBRA-2472-	SC	375.71	576.15	402.50	602.94	510.87	711.31	1008.22	1254.55	1146.27	1378.96
30"(762mm)	48"(1219mm)	WBRA-3048-	SC	\$330.65	\$497.25	\$354.32	\$520.92	\$439.83	\$606.43	\$ 918.64	\$1123.69	\$1040.91	\$1273.60
	54"(1372mm)	WBRA-3054-	SC	355.19	530.25	380.72	555.78	478.53	653.59	967.60	1182.97	1098.51	1331.20
	60"(1524mm)	WBRA-3060-	SC	379.73	563.25	407.12	590.64	517.23	700.75	1016.56	1242.25	1156.11	1388.80
	66"(1676mm)	WBRA-3066-	SC	404.27	596.25	433.52	625.50	555.93	747.91	1065.52	1301.53	1213.71	1446.40
	72"(1829mm)	WBRA-3072-	SC	428.81	629.25	459.92	660.36	594.63	795.07	1114.48	1360.81	1271.31	1504.00



### Features

- Includes 1.19"(30mm) thick laminate or wood worksurface and attachment hardware.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge, 1mm edgeband on sides and back.
  - Knife edge worksurface has knife edge on user edge, 1mm edgeband on sides and back.

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- For use with starter kit or add-on kit with no access hatches, option (-C).
- When attached to starter or add-on kit, worksurface has a 1"(25mm) gap between the back edge of the surface and the rail.
- In double sided applications, there is a total of 3.64"(92mm) between the back edges of the surfaces (includes depth of rail and gap between rail and worksurfaces).
- May not be supported by attached lower storage.
- Angled Legs are required for Knife Edge worksurface option.
- X Series 23"(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24"(610mm) deep worksurface with a Utility Tray.
- Only for use with Active Components attached storage. See Active Components Price List.
- May be used with Belong Work Tools and Accessories, Adjustable Keyboard Pads and Monitor Arms.

### To Order, Specify:

1) Product number, including:

#### ① Top Option:

- L Laminate
- W Wood

#### ② Edge Option:

Laminate:

- J Edgeband
- F Knife

Wood:

- K Edgeband
- U Knife


2) Laminate or Wood finish color.

3) Edge trim color (laminate only).

# Worksurfaces

Rectangular Worksurface – For Use with Access Hatches

Actual Depth	Nominal Depth	Width	Number	① ②	Laminate A		Laminate B		Laminate E		Wood Group A		Wood Group B	
					Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
20"(508mm)	24"(610mm)	48"(1219mm)	WBRA-2448-	SS	\$277.55	\$444.15	\$296.90	\$463.50	\$356.07	\$522.67	\$ 812.38	\$1017.43	\$ 915.87	\$1148.56
		54"(1372mm)	WBRA-2454-	SS	302.09	477.15	323.30	498.36	394.77	569.83	861.34	1076.71	973.47	1206.16
		60"(1524mm)	WBRA-2460-	SS	326.63	510.15	349.70	533.22	433.47	616.99	910.30	1135.99	1031.07	1263.76
		66"(1676mm)	WBRA-2466-	SS	351.17	543.15	376.10	568.08	472.17	664.15	959.26	1195.27	1088.67	1321.36
		72"(1829mm)	WBRA-2472-	SS	375.71	576.15	402.50	602.94	510.87	711.31	1008.22	1254.55	1146.27	1378.96
26"(660mm)	30"(762mm)	48"(1219mm)	WBRA-3048-	SS	\$330.65	\$497.25	\$354.32	\$520.92	\$439.83	\$606.43	\$ 918.64	\$1123.69	\$1040.91	\$1273.60
		54"(1372mm)	WBRA-3054-	SS	355.19	530.25	380.72	555.78	478.53	653.59	967.60	1182.97	1098.51	1331.20
		60"(1524mm)	WBRA-3060-	SS	379.73	563.25	407.12	590.64	517.23	700.75	1016.56	1242.25	1156.11	1388.80
		66"(1676mm)	WBRA-3066-	SS	404.27	596.25	433.52	625.50	555.93	747.91	1065.52	1301.53	1213.71	1446.40
		72"(1829mm)	WBRA-3072-	SS	428.81	629.25	459.92	660.36	594.63	795.07	1114.48	1360.81	1271.31	1504.00



### Features

- Includes 1.19"(30mm) thick laminate or wood worksurface and attachment hardware.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge, 1mm edgeband on sides and back.
  - Knife edge worksurface has knife edge on user edge, 1mm edgeband on sides and back.
- For use on Starter Kits and Add-On Kits specified with access hatches.

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- For use with Starter Kit or Add-On Kit with access hatches, option (-S).
- Access hatches at the back of the worksurface are factory-installed with Starter Kit or Add-On Kit.
- 24"(610mm) deep worksurface provides 20"(508mm) of depth from the front edge to the access hatches.
- 30"(762mm) deep worksurface provides 26"(660mm) of depth from the front edge to the access hatches.
- Gap between back edge of worksurface and access hatches is 1"(25mm).
- May not be supported by attached lower storage.
- Angled Legs are required for Knife Edge worksurface option.
- X series 23"(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24"(610mm) deep worksurface with a Utility Tray.
- Only for use with Active Components attached storage. See Active Components Price List.
- May be used with most Belong Work Tools and Accessories, Adjustable Keyboard Pads and Monitor Arms (with special clamp); refer to the appropriate price list pages for details.

### To Order, Specify:

- 1) Product number, including:

#### ① Top Option:

**L** Laminate

**W** Wood

#### ② Edge Option:

Laminate:

**J** Edgeband

**F** Knife

Wood:

**K** Edgeband

**U** Knife


- 2) Laminate or Wood finish color.
- 3) Edge trim color (laminate only).



# Worksurfaces

## Rectangular Bench End Worksurface

Depth	Width	Number ① ②	Laminate A		Laminate B		Wood Group A		Wood Group B	
			Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
51"(1295mm)	24"(610mm)	WBDA-5124- SC	\$298.25	\$464.85	\$317.60	\$484.20	\$ 833.08	\$1038.13	\$ 936.57	\$1169.26
	30"(762mm)	WBDA-5130- SC	\$322.79	\$489.39	\$344.00	\$510.60	\$882.04	\$1087.09	\$994.17	\$1226.86
63"(1600mm)	24"(610mm)	WBDA-6324- SC	\$366.89	\$533.49	\$392.36	\$558.96	\$1045.60	\$1250.65	\$1186.65	\$1419.34
	30"(762mm)	WBDA-6330- SC	\$391.43	\$558.03	\$418.76	\$585.36	\$1094.56	\$1299.61	\$1244.25	\$1476.94



WBDA-SC

### Features

- Includes 1.19"(30mm) thick laminate or wood worksurface.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge and sides, 1mm edgeband on back.
  - Knife edge worksurface has knife edge on user edge and sides, 1mm edgeband on back.
- Attaches at the end of a double-sided bench using bench end legs, specified separately.

### Specification Tips

- 51"(1295mm) deep worksurface attaches to 48"(1219mm) deep double sided bench.
- 63"(1600mm) deep worksurface attaches to 60" deep double sided bench.
- Worksurface is not available with access hatches and is non-powered.
- Worksurface is not available with a rail and does not accept an Intuity screen.

### To Order, Specify:

- 1) Product number, including:

#### ① Top Option:

- L Laminate
- W Wood

#### ② Edge Option:

Laminate:

- J Edgeband
- F Knife

Wood:


- K Edgeband
- U Knife

- 2) Laminate or Wood finish color.
- 3) Edge trim color (laminate only).

# Worksurfaces

## Rectangular Return Worksurface

Depth	Width	Number <sup>1</sup> <sup>2</sup>	Laminate A		Laminate B		Wood Group A		Wood Group B	
			Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
24"(610mm)	48"(1219mm)	WBRB-2448- SC	\$213.96	\$417.31	\$384.80	\$588.15	\$465.89	\$670.94	\$514.22	\$719.27
	54"(1372mm)	WBRB-2454- SC	236.38	443.18	409.01	615.81	490.02	707.15	542.68	759.81
	60"(1524mm)	WBRB-2460- SC	258.80	469.05	433.22	643.47	514.15	743.36	571.14	800.35
30"(762mm)	48"(1219mm)	WBRB-3048- SC	\$243.28	\$446.63	\$416.46	\$619.81	\$547.01	\$752.06	\$609.76	\$814.81
	54"(1372mm)	WBRB-3054- SC	265.70	472.50	440.67	647.47	571.14	788.27	638.22	855.35
	60"(1524mm)	WBRB-3060- SC	288.12	498.37	464.88	675.13	595.27	824.48	666.68	895.89



WBRB-SC

### Features

- Includes 1.19"(30mm) thick laminate or wood rectangular worksurface.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge, 1mm edgeband on sides and back.
  - Knife edge worksurface has knife edge on user edge, 1mm edgeband on sides and back.
- Attaches along the front of a benching surface using return leg kit, specified separately.

### Specification Tips

- Worksurface is not available with access hatches and is non-powered.
- Worksurface is not available with a rail and does not accept an Intuity screen.
- Specify surface depth to match return leg depth.
- Knife edge return has square edges on sides; when used with a knife edge benching surface, edge profile of return will not match front edge of benching surface. To avoid a gap in edge profiles, specify benching surface with edgeband.

### To Order, Specify:

- 1) Product number, including:

#### 1 Top Option:

- L Laminate
- W Wood

#### 2 Edge Option:

Laminate:

- J Edgeband
- F Knife

Wood:


- K Edgeband
- U Knife

- 2) Laminate or Wood finish color.
- 3) Edge trim color (laminate only).


# Worksurfaces

Corner, 120° Wrap-Around

Left/Right Depth	Width	Number	① ② ③	Laminate A		Laminate B		Wood Group A		Wood Group B	
				Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
24"(610mm)	42"(1067mm)	WBCZ-4242-	■ S ■ N44	\$517.74	\$ 850.29	\$531.83	\$ 864.38	\$1599.56	\$2420.82	\$1860.65	\$2681.91
	48"(1219mm)	WBCZ-4848-	■ S ■ N44	594.90	950.28	612.38	967.76	1773.80	2694.60	2065.82	2986.62
	54"(1372mm)	WBCZ-5454-	■ S ■ N44	672.06	1050.27	692.93	1071.14	1948.04	2968.38	2270.99	3291.33
30"(762mm)	42"(1067mm)	WBCZ-4242-	■ S ■ N55	\$538.48	\$ 895.91	\$554.23	\$ 911.66	\$1765.47	\$2586.73	\$2056.10	\$2877.36
	48"(1219mm)	WBCZ-4848-	■ S ■ N55	615.64	995.90	634.78	1015.04	1939.71	2860.51	2261.27	3182.07
	54"(1372mm)	WBCZ-5454-	■ S ■ N55	692.80	1095.89	715.33	1118.42	N/A	N/A	N/A	N/A



Wireway Options:

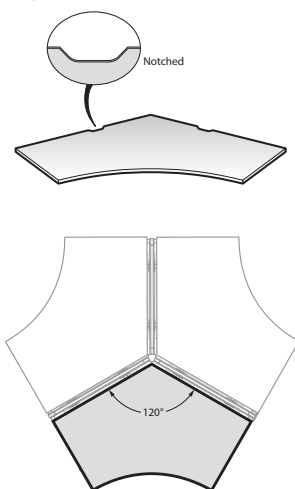

WBCZ-S

### Features

- Includes 1.19"(30mm) thick laminate or wood worksurface and tie plate.
- Available with edgeband or knife edge.
- Edgeband worksurface has 3mm edgeband on the user edge, 1mm edgeband on sides and back.
- Knife edge worksurface has knife edge on user edge, 1mm edgeband and on sides and back.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood veneer, wood grain or patterned laminate is specified, wireway will be charcoal. Refer to Specification Guide for wireway details.
- Depths and widths shown in nominal dimensions.

### Specification Tips

- For 120° single or three-pack applications; not for return benching applications.
- When attached to a starter or add-on kit, worksurface has a 1"(25mm) gap between the back edges of the surface and the rail.
- In double sided applications, there is a total of 3.64"(92mm) between the back edges of the surfaces (includes depth of rail and gap between rail and worksurfaces).
- May not be supported by attached lower storage.
- Angled legs are required for Knife Edge worksurface option.
- X Series 23"(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24"(610mm) deep worksurface with Utility Tray.
- Only for use with Active Components attached storage. See Active Components Price List.
- May be used with Belong Work Tools, Accessories, Adjustable Keyboard Pads and Monitor Arms.

### To Order, Specify:

- 1) Product number, including:

#### ① Top Option:

- L** Laminate
- W** Wood

#### ② Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:


- K** Edgeband
- U** Knife

#### ③ Wireway Option:

- A** Notched
- B** Without

- 2) Laminate or Wood finish color.
- 3) Edge trim color (laminate only).

# Accessories


	Number	Price
<b>Tie Plate</b>  ZBBP-0000-PN SIN 33721: Discount Group XXIII	ZBBP-0000-PN	\$28.62

**Features**

- Includes painted tie plate and attachment hardware.
- Tie plate is used to connect a single sided kit to a double sided kit.
- Required for pass-through power.
- Standard in Black.

**To Order, Specify:**

- 1) Product number.  
(No finish specification required.)


<b>Double-Sided Utility Tray End Covers</b>  EUEC-0000 SIN 33721: Discount Group XXIII	EUEC-0000	\$109.10
---	-----------	----------

**Features**

- Includes two covers and hardware.
- For use on double sided kits.
- Standard in Black.

**To Order, Specify:**

- 1) Product number.  
(No finish specification required.)

	Number	Trim	
		A	B
<b>120° Infeed Cover</b>  EBEC-0000-F SIN 33721: Discount Group XXIII	EBEC-0000-F	\$216.51	\$233.13

**Features**


- Includes 3-piece cover and attachment hardware.
- Optional cover is used to conceal infeed for electrical application and/or cover three center post legs.

**To Order, Specify:**

- 1) Product number.
- 2) Trim color.

**Specification Tip**

- Only for use with Three Pack 120° workstations.

	Single Sided	Double Sided
<b>Access Hatch Gap Filler</b>  ZBRA-0000-D	ZBRA-0000-S	\$ 77.65 \$ 95.59
	ZBRA-0000-D	\$107.86 \$125.80

**Features**


- Includes painted aluminum extrusion(s) and attachment hardware.
- Fits between a starter and add-on kit, or between two add-on kits, to fill the gap between the access hatches.
- Single sided includes one filler piece; double sided includes two filler pieces.

**To Order, Specify:**

- 1) Product number.
- 2) Trim color.

**Specification Tip**

- Single sided filler piece and double side filler piece are specific to the application and cannot be interchanged.

	Actual Height	Actual Depth	Number	Price
<b>Accessory Rail Mounting Bracket Kit, Double Sided</b>  BABD GSA: Open Market	3"(76mm)	13.75"(349mm)	BABD-0000	\$116.12


**Features**

- Includes two mounting brackets and attachment hardware.
- Allows attachment of two accessory rails (back-to-back) in a double-sided application.
- Brackets are black finish color.

**To Order, Specify:**

- 1) Product number  
(No finish specification required.)

## Electrical Components

	Description	Feed Length	Number	Price
 <p><b>Infeed Harness</b></p> <p>EUEH-0087-3 EUEH-0087-2 EUEH-0087-4</p> <p>Class YA – SIN 33721: Discount Group XIII</p>	<b>3-Circuit</b>	87"(2210mm)	EUEH-0087-3	\$276.75
		180"(4572mm)	EUEH-00F0-3	427.66
		300"(7620mm)	EUEH-00W0-3	720.59
	<b>4-Circuit, 2+2</b>	87"(2210mm)	EUEH-0087-2	\$303.70
		180"(4572mm)	EUEH-00F0-2	454.61
		300"(7620mm)	EUEH-00W0-2	747.54
	<b>4-Circuit, 3+1</b>	87"(2210mm)	EUEH-0087-4	\$303.70
		180"(4572mm)	EUEH-00F0-4	454.61
		300"(7620mm)	EUEH-00W0-4	747.54

**Features**


- Includes electrical harness in galvanized metal conduit.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- Can be used to route power from floor to power distribution assembly.
- For use with components equipped with power.
- Attaches at any receptacle site or right-hand jumper location.

**Specification Tips**

- **Not for use with power sources other than 120 volt 60 hertz.**
- A vertical base feed cover is a separately specified option.
- Exposed split tubing may be field supplied separately to cover exposed galvanized metal conduit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

**To Order, Specify:**

- 1) Product number.  
(No finish specification required.)

**Base Feed Module —  
Hardwire Connection**

EUEB-0000-3HY  
EUEB-0000-2HY  
EUEB-0000-4HY

Class SP – SIN 33721:  
Discount Group V



3-Circuit	EUEB-0000-3HY	\$452.14
4-Circuit, 2+2	EUEB-0000-2HY	\$452.14
4-Circuit, 3+1	EUEB-0000-4HY	\$452.14

**Features**

- Includes one junction box with modular connector, flexible steel conduit and three 0.5"(13mm) knockouts.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- For use with components equipped with power.
- Attaches at any receptacle site or right-hand jumper location.
- For floor, column or wall hardwire connections.
- Conforms to New York City electrical code.

**Specification Tips**


- **Not for use with power sources other than 120 volt 60 hertz.**
- A vertical base feed cover is a separately specified option.
- For installation on components 42"(1067mm) or larger.
- Conduit and fittings for connection between building and junction box are supplied by local electricians.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

**To Order, Specify:**

- 1) Product number.  
(No finish specification required.)

# Electrical Components

	Description	Feed Length	Number	Price
<b>Single Circuit Base Feed – Receptacle Connection with Power Cord — 3-Circuit and 4-Circuit</b>	3-Circuit	24”(610mm)	4TEB-20	<b>\$440.92</b>
	4-Circuit, 2+2		4TEB-20-2	<b>440.92</b>
	4-Circuit, 3+1		4TEB-20-4	<b>440.92</b>




- Features**
- Includes one base feed, 24”(610mm) cord, junction box, 53”(1346mm) flexible conduit and 20 amp plug (NEMA 5-20P).
  - For use with product equipped with 3-circuit or 4-circuit power components.
  - Requires a 20 amp, 125 volt building receptacle (NEMA 5-20R) for plug-in (not included).
  - Provides power to circuit #1 only.
  - Attaches at any flex/jumper locations on a Power Distribution Assembly (PDA).
  - Standard in charcoal trim color only.

- To Order, Specify:**
- 1) Product number. (No finish specification required.)

- Specification Tips**
- **Not for use with isolated ground receptacles.**
  - **Not for use with power sources other than 120 volt 60 hertz.**
  - **Not for use in Canada due to electrical code restrictions.**
  - Junction box must be secured to furniture or architectural support.
  - Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
  - Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

<b>Single Circuit Base Feed – Receptacle Connection — 3-Circuit and 4-Circuit</b>	3-Circuit	72”(1829mm) <b>(Canada only)</b>	4TEB-15	<b>\$440.92</b>
	4-Circuit, 2+2		4TEB-15-2	<b>440.92</b>
	4-Circuit, 3+1		4TEB-15-4	<b>440.92</b>




- Features**
- Includes one base feed, 72”(1829mm) cord, junction box, 53”(1346mm) flexible conduit and 15 amp plug (NEMA 5-15P).
  - For use with product equipped with 3-circuit or 4-circuit power components.
  - Requires a 15 amp, 125 volt building receptacle (NEMA 5-15R) for plug-in (not included).
  - Attaches at any flex/jumper locations on a Power Distribution Assembly (PDA).
  - Provides power to circuit #1 only.
  - Standard in charcoal trim color only.

- To Order, Specify:**
- 1) Product number. (No finish specification required.)

- Specification Tips**
- **Not for use in USA due to electrical code restrictions.**
  - **Not for use with isolated ground receptacles.**
  - Not for use with power sources other than 120 volt 60 hertz.
  - Junction box must be secured to furniture or architectural support.
  - Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
  - Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

<b>Base Feed Module Hardwire Connection</b>			4TEB-1	<b>\$465.84</b>
---	--	--	--------	-----------------







- Features**
- Includes one base feed with 6’(1829mm) long, black .05”(13mm) flexible metal conduit with eight 12-gauge wires for up to three 20-amp circuits of power.
  - For floor, column, or wall hardwire connections.
  - Base feed module can be field modified to accommodate left or right conditions.
  - Attaches to any of the receptacle sites.
  - Standard in charcoal trim color only.

- To Order, Specify:**
- 1) Product number. (No finish specification required.)

- Specification Tips**
- **Not for use with power sources other than 120 volt 60 hertz.**
  - Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
  - Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.


## Electrical Components

	Description	Feed Length	Number	Price
 <p><b>Internal Power Base™ AI Base Feed</b></p> <p>EUEJ-0064-3WF EUEJ-0064-2WF EUEJ-0064-4WF</p> <p>Class SP – SIN 33721; Discount Group V</p> 	<b>3-Circuit</b>			
		64"(1626mm)	EUEJ-0064-3WF	\$276.75
		144"(3658mm)	EUEJ-0144-3WF	384.57
		300"(7620mm)	EUEJ-0300-3WF	918.29
	<b>4-Circuit, 2+2</b>			
		64"(1626mm)	EUEJ-0064-2WF	\$303.70
		144"(3658mm)	EUEJ-0144-2WF	411.52
		300"(7620mm)	EUEJ-0300-2WF	945.24
	<b>4-Circuit, 3+1</b>			
		64"(1626mm)	EUEJ-0064-4WF	\$303.70
		144"(3658mm)	EUEJ-0144-4WF	411.52
		300"(7620mm)	EUEJ-0300-4WF	945.24
	<b>Features</b>			
	<ul style="list-style-type: none"> <li>Includes connector assembly which consists of one Power Base connector head, galvanized 0.5"(13mm) flexible metal conduit, one Power Base AI connector head and a two port splitter.</li> <li>Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.</li> <li>Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.</li> <li>For use with components equipped with power.</li> <li>Attaches at any receptacle site or right-hand jumper location and to a Power Base AI underfloor power system.</li> </ul>			
	<b>Specification Tips</b>			
	<ul style="list-style-type: none"> <li><b>Not for use with power sources other than 120 volt 60 hertz.</b></li> <li>A vertical base feed cover is a separately specified option when used with Intuity.</li> <li>Exposed split tubing may be field supplied separately to cover exposed galvanized metal conduit.</li> <li>Excess length can be coiled under floor.</li> <li>Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).</li> <li>Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.</li> </ul>			
	<b>To Order, Specify:</b>			
			1) Product number. (No finish specification required.)	

	Description	Actual Length	Number	Price
 <p><b>Jumper</b></p> <p>EUEJ-0024-3 EUEJ-0024-2 EUEJ-0024-4</p> <p>Class YA – SIN 33721; Discount Group XIII</p> 	<b>3-Circuit</b>			
		24"(610mm)	EUEJ-0024-3	\$166.35
	<b>4-Circuit, 2+2</b>			
		24"(610mm)	EUEJ-0024-2	\$177.19
	<b>4-Circuit, 3+1</b>			
		24"(610mm)	EUEJ-0024-4	\$177.19
	<b>Features</b>			
	<ul style="list-style-type: none"> <li>Includes flexible metal power jumper with safety latches.</li> <li>For use with power components.</li> <li>Jumpers cannot be coupled together.</li> <li>Field installed.</li> </ul>			
	<b>Specification Tips:</b>			
	<ul style="list-style-type: none"> <li><b>Jumpers are used to connect between Power Distribution Assemblies mounted in Utility Trays in an in-line benching application.</b></li> <li>One 24"(610mm) jumper is included with Add-On Kit.</li> <li>For use with Intuity product reconfigurations.</li> <li>Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).</li> <li>Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.</li> </ul>			
	<b>To Order, Specify:</b>			
			1) Product number. (No finish specification required.)	

# Electrical Components

## Utility Tray Power Retrofit Kit



EUEK-3S  
EUEK-2S  
EUEK-4S



Description	Panel Width	PDA Length	Number	Price
<b>3-Circuit</b>				
	42"(1067mm)	19"(483mm)	EUEK-0042-3S	\$ 78.67
	48"(1219mm)	25"(635mm)	EUEK-0048-3S	88.06
	54"(1372mm)	31"(787mm)	EUEK-0054-3S	97.45
	60"(1524mm)	37"(940mm)	EUEK-0060-3S	106.84
	66"(1676mm)	43"(1092mm)	EUEK-0066-3S	116.23
	72"(1829mm)	49"(1245mm)	EUEK-0072-3S	125.62
<b>4-Circuit, 2+2</b>				
	42"(1067mm)	19"(483mm)	EUEK-0042-2S	\$ 78.67
	48"(1219mm)	25"(635mm)	EUEK-0048-2S	88.06
	54"(1372mm)	31"(787mm)	EUEK-0054-2S	97.45
	60"(1524mm)	37"(940mm)	EUEK-0060-2S	106.84
	66"(1676mm)	43"(1092mm)	EUEK-0066-2S	116.23
	72"(1829mm)	49"(1245mm)	EUEK-0072-2S	125.62
<b>4-Circuit, 3+1</b>				
	42"(1067mm)	19"(483mm)	EUEK-0042-4S	\$ 78.67
	48"(1219mm)	25"(635mm)	EUEK-0048-4S	88.06
	54"(1372mm)	31"(787mm)	EUEK-0054-4S	97.45
	60"(1524mm)	37"(940mm)	EUEK-0060-4S	106.84
	66"(1676mm)	43"(1092mm)	EUEK-0066-4S	116.23
	72"(1829mm)	49"(1245mm)	EUEK-0072-4S	125.62

### Features

- Includes Power Distribution Assembly (PDA).
- Field installed.

### To Order, Specify:

- 1) Product number.  
(No finish specification required.)


### Specification Tips:

- Used to convert non-powered Utility Tray to powered.
- **Separately Specify:**
  - Receptacles
  - Jumpers
  - Power Infeeds
  - Utility Tray End Covers
- When adding retrofit kit, order PDA mounting brackets, service part #2305-8603, separately.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).



# Electrical Components

## Top Feed



EKET-C000-3S  
EKET-C000-2S  
EKET-C000-4S



Floor Mount  
EKET-3S

Description	Ceiling Height	Pole Length	Number	Trim	
				A	B
<b>Floor Mount Height</b>					
3-Circuit	10'(3048mm)	138''(3505mm)	EKET-C000-3S	\$1344.09	\$1430.91
	12'(3658mm)	150''(3810mm)	EKET-E400-3S	1373.03	1474.33
4-Circuit, 2+2	10'(3048mm)	138''(3505mm)	EKET-C000-2S	\$1344.09	\$1430.91
	12'(3658mm)	150''(3810mm)	EKET-E400-2S	1373.03	1474.33
4-Circuit, 3+1	10'(3048mm)	138''(3505mm)	EKET-C000-4S	\$1344.09	\$1430.91
	12'(3658mm)	150''(3810mm)	EKET-E400-4S	1373.03	1474.33

### Features

- Includes one 180''(4572mm) electrical harness in metal conduit, electrical box, ceiling bezel plate, pole and hardware.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- For connection to the electrical source located in space above a drop ceiling.
- Removable cover on poles provides access to pathway.
- Top feed pole dimensions: 2.5''(64mm) x 8''(203mm).
- Harness attaches at any receptacle site or right-hand jumper location.

### To Order, Specify:





- 1) Product number.
- 2) Trim color.

### Specification Tips

- **Not for use with power sources other than 120 volt 60 hertz.**
- Electrical harness length is 180''(4572mm) regardless of pole length.
- Top Feed may interfere with Tool Rail or Screen applications.
- Floor mount Top Feed mounts to floor, attaches to desking worksurface at any side and ceiling.
- Floor attachment hardware is field supplied.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

# Electrical Components

Description	Circuit Access	Receptacle Indicator	Ground Type	Receptacle without Controlled Symbol	Price	Receptacle with Controlled Symbol	Price
<b>Triplex Receptacle – 15 Amp</b>							
<b>3-Circuit</b>							
	Circuit 1-3	N/A	Common	EUER-153P-GS0S	<b>\$177.24</b>	EUER-153P-GC0S	<b>\$181.68</b>
	Circuit 1-3	N/A	Isolated	EUER-153P-IS0S	<b>188.08</b>	EUER-153P-IC0S	<b>192.79</b>
<b>4-Circuit, 2+2</b>							
	Circuit 1	1	Common	EUER-1521-GS0S	<b>\$253.21</b>	EUER-1521-GC0S	<b>\$259.54</b>
	Circuit 2	2		EUER-1522-GS0S	<b>253.21</b>	EUER-1522-GC0S	<b>259.54</b>
	Circuit 3	3		EUER-1523-GS0S	<b>253.21</b>	EUER-1523-GC0S	<b>259.54</b>
	Circuit 4	4		EUER-1524-GS0S	<b>253.21</b>	EUER-1524-GC0S	<b>259.54</b>
	Circuit 1	1	Isolated	EUER-1521-IS0S	<b>\$264.05</b>	EUER-1521-IC0S	<b>\$270.66</b>
	Circuit 2	2		EUER-1522-IS0S	<b>264.05</b>	EUER-1522-IC0S	<b>270.66</b>
	Circuit 3	3		EUER-1523-IS0S	<b>264.05</b>	EUER-1523-IC0S	<b>270.66</b>
	Circuit 4	4		EUER-1524-IS0S	<b>264.05</b>	EUER-1524-IC0S	<b>270.66</b>
<b>4-Circuit, 3+1</b>							
	Circuit 1	A	Common	EUER-1541-GS0S	<b>\$253.21</b>	EUER-1541-GC0S	<b>\$259.54</b>
	Circuit 2	B		EUER-1542-GS0S	<b>253.21</b>	EUER-1542-GC0S	<b>259.54</b>
	Circuit 3	C		EUER-1543-GS0S	<b>253.21</b>	EUER-1543-GC0S	<b>259.54</b>
	Circuit 4	D		EUER-1544-GS0S	<b>253.21</b>	EUER-1544-GC0S	<b>259.54</b>
	Circuit 1	A	Isolated	EUER-1541-IS0S	<b>\$264.05</b>	EUER-1541-IC0S	<b>\$270.66</b>
	Circuit 2	B		EUER-1542-IS0S	<b>264.05</b>	EUER-1542-IC0S	<b>270.66</b>
	Circuit 3	C		EUER-1543-IS0S	<b>264.05</b>	EUER-1543-IC0S	<b>270.66</b>
	Circuit 4	D		EUER-1544-IS0S	<b>264.05</b>	EUER-1544-IC0S	<b>270.66</b>



EUER-15

Circuit Symbol	Circuit 1	Circuit 2	Circuit 3	Circuit 4
3 Circuit	0	00	000	NA
4 Circuit 2+2	1	2	3	4
4 Circuit 3+1	A	B	C	D

**Features**

- Includes box of six receptacles, each receptacle has three 15 Amp outlets (NEMA 5-15R configuration).
- For use with panels equipped with power components.
- Receptacles are ground type specific.

**Specification Tips**

- Not for use with power sources other than 120 volt 60 hertz.
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit base feed module.
- Triplexes for 3-Circuit are field programmable.
- Triplexes for 4-Circuit have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
- **Controlled receptacles are marked with a permanent symbol and the word CONTROLLED to comply with various energy code requirements including ASHRAE 90.1 and California Building Code Title 24 part 6.**
- **Circuit assignment and receptacle placement should be coordinated with a local electrician. Local electrician is responsible for circuit loading and code compliance.**
- **Consult with local authority having jurisdiction (AHJ) for requirements regarding controlled receptacles before placing orders and installation.**





**To Order, Specify:**

- 1) Product number.
- 2) Trim color.

TR-R	Beige
TR-TY	Cement
TR-AK	Chalk
TR-K	Charcoal
TR-J	Graphite
TR-G	Gray Tone
TR-NG	Orange* Isolated ground only
TR-TW	Plaster
TR-AA	Putty
TR-E	Smoke

# Electrical Components

## Triplex Receptacle – 20 Amp



EUE-20

Circuit Symbol	Circuit 1	Circuit 2	Circuit 3	Circuit 4
3 Circuit	I	II	III	NA
4 Circuit 2+2	1	2	3	4
4 Circuit 3+1	A	B	C	D

Description	Circuit Access	Receptacle Indicator	Ground Type	Receptacle without Controlled Symbol	Price	Receptacle with Controlled Symbol	Price
<b>3-Circuit</b>							
	Circuit 1	1	Common	EUE-2031-GS0S	\$524.52	EUE-2031-GC0S	\$537.61
	Circuit 2	2		EUE-2032-GS0S	524.52	EUE-2032-GC0S	537.61
	Circuit 3	3		EUE-2033-GS0S	524.52	EUE-2033-GC0S	537.61
	Circuit 1	1	Isolated	EUE-2031-IS0S	\$535.35	EUE-2031-IC0S	\$548.72
	Circuit 2	2		EUE-2032-IS0S	535.35	EUE-2032-IC0S	548.72
	Circuit 3	3		EUE-2033-IS0S	535.35	EUE-2033-IC0S	548.72
<b>4-Circuit, 2+2</b>							
	Circuit 1	1	Common	EUE-2021-GS0S	\$524.52	EUE-2021-GC0S	\$537.61
	Circuit 2	2		EUE-2022-GS0S	524.52	EUE-2022-GC0S	537.61
	Circuit 3	3		EUE-2023-GS0S	524.52	EUE-2023-GC0S	537.61
	Circuit 4	4		EUE-2024-GS0S	524.52	EUE-2024-GC0S	537.61
	Circuit 1	1	Isolated	EUE-2021-IS0S	\$535.35	EUE-2021-IC0S	\$548.72
	Circuit 2	2		EUE-2022-IS0S	535.35	EUE-2022-IC0S	548.72
	Circuit 3	3		EUE-2023-IS0S	535.35	EUE-2023-IC0S	548.72
	Circuit 4	4		EUE-2024-IS0S	535.35	EUE-2024-IC0S	548.72
<b>4-Circuit, 3+1</b>							
	Circuit 1	A	Common	EUE-2041-GS0S	\$524.52	EUE-2041-GC0S	\$537.61
	Circuit 2	B		EUE-2042-GS0S	524.52	EUE-2042-GC0S	537.61
	Circuit 3	C		EUE-2043-GS0S	524.52	EUE-2043-GC0S	537.61
	Circuit 4	D		EUE-2044-GS0S	524.52	EUE-2044-GC0S	537.61
	Circuit 1	A	Isolated	EUE-2041-IS0S	\$535.35	EUE-2041-IC0S	\$548.72
	Circuit 2	B		EUE-2042-IS0S	535.35	EUE-2042-IC0S	548.72
	Circuit 3	C		EUE-2043-IS0S	535.35	EUE-2043-IC0S	548.72
	Circuit 4	D		EUE-2044-IS0S	535.35	EUE-2044-IC0S	548.72

### Features

- Includes box of six receptacles, each receptacle has three 20 Amp outlets (NEMA 5-20R configuration).
- For use with panels equipped with power components.
- **Receptacles are circuit and ground type specific.**

### Specification Tips

- Not for use with power sources other than 120 volt 60 hertz.
- Receptacles have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit base feed module.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
- **Controlled receptacles are marked with a permanent symbol and the word CONTROLLED to comply with various energy code requirements including ASHRAE 90.1 and California Building Code Title 24 part 6.**
- **Circuit assignment and receptacle placement should be coordinated with a local electrician. Local electrician is responsible for circuit loading and code compliance.**
- **Consult with local authority having jurisdiction (AHJ) for requirements regarding controlled receptacles before placing orders and installation.**

### To Order, Specify:


- 1) Product number.
- 2) Trim color.

TR-R	Beige
TR-TY	Cement
TR-AK	Chalk
TR-K	Charcoal
TR-J	Graphite
TR-G	Gray Tone
TR-NG	Orange* Isolated ground only
TR-TW	Plaster
TR-AA	Putty
TR-E	Smoke

# Electrical Components

## Hardwire

	Height	Ceiling Height	Pole Length	Number	Trim A	B
<b>Top Feed — Hardwire</b>	<b>Floor Mount Height</b>					
	Hardwire	10'(3048mm)	138"(3505mm)	EKET-C000-CS	<b>\$495.88</b>	<b>\$582.70</b>
		12'(3658mm)	150"(3810mm)	EKET-E400-CS	<b>\$24.82</b>	<b>\$26.12</b>



### Features

- Includes one electrical box, ceiling bezel plate, pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For routing and cabling capacities, refer to Specification Guide.
- Removable cover on poles provides access to pathway.
- Top feed pole dimensions: 2.5"(64mm) x 8"(203mm).


### To Order, Specify:

- 1) Product number.
- 2) Trim color.

### Specification Tips

- **Not for use with power sources other than 120 volt 60 hertz.**
- Top Feed may interfere with Tool Rail or Screen applications.
- Floor mount Top Feed mounts to floor, attaches to desking worksurface at any side and ceiling.
- Floor attachment hardware is field supplied.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

## Hardwire Kit



	Number	Trim A	B
	EKEP-0000-C	<b>\$205.90</b>	<b>\$205.90</b>

### Features

- Includes one electrical box with 0.5"(13mm) knockouts, two receptacle cover plates, one blank cover plate and mounting hardware.
- Attaches to separately specified non-powered Utility Tray.
- Field installed.



### To Order, Specify:

- 1) Product number.
- 2) Trim color.

### Specification Tips

- **Conduit, fittings, wiring and receptacles are field supplied.**
- For single sided applications, specify service part #6240-4207 separately.

## Cover Plates



	Number <sup>1</sup>	Trim A	B
	EUAP-0000-C	<b>\$37.43</b>	<b>\$46.82</b>

### Feature

- Includes four blank cover plates or receptacle covers and hardware.

### To Order, Specify:

- 1) Product number.


### <sup>1</sup> Cover Options:

- B** Blank cover
- R** Receptacle cover; **\$9.39** upcharge list.

- 2) Trim color.

# Electrical Accessories

Description	Bottom of surface to floor	Number	Trim	
			A	B
<b>Base Feed Cover — Vertical</b>				
Fixed Height	27.5"-28.5"(699mm-724mm)	EUAC-0000-F	<b>\$233.98</b>	<b>\$248.95</b>
Adjustable Height	25.5"-32.5"(648mm-826mm)	EUAC-0000-A	<b>233.98</b>	<b>248.95</b>

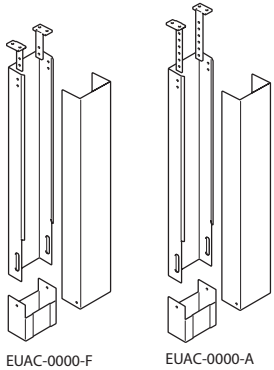

**Features**

- Includes 2-piece base feed cover and attachment hardware.
- Optional base feed cover is used to conceal metal conduit and data cables.
- Base feed dimension: 2"(51mm) x 4.25"(108mm).

**To Order, Specify:**

- 1) Product number.
- 2) Trim color.

**Specification Tips**

- Used to route power and data from floor, columns and walls to bottom of horizontal surface.
- Mounts under horizontal surface and attaches to floor.
- Floor attachment hardware is field supplied.

# Finish/Color Legend

## Wood Finishes

**Grade A**  
Double Cut

WE-RD	Dune
WJ-RE	Ebony
2N-RL	Echo
W3-HR	Harbor
WE-RT	Melba
W4-PB	Pebble
CQ-WG	Walnut Grove

**Grade B**  
Cherry

VC-CA1	Amber
VC-W23	American
VC-W33	Caramel
VC-W30	Heritage
VC-W32	Pacific

Maple

VP-LM	Light
VP-N	Natural

Maple Quarter Cut

NM-N	Natural
------	---------

Rift Cut White Oak

NR-W15	Espresso
NR-W40	Mocha

Walnut

VR-W15	Espresso
VR-W31	Retro

Walnut Quarter Cut

NW-W35	Clear
NW-W15	Espresso
NW-W31	Retro

## Laminate

**Grade A**  
Solid Color

H-34	Beige
H-AK	Chalk
H-8J	Charcoal
H-3J	Graphite
H-62	Gray Tone
H-WL	Linen
H-3P	Platinum
H-AA	Putty
H-3E	Smoke

Patterned

H-P1	Linen Casual
H-P2	Linen Classic
H-P3	Linen Crisp
H-P4	Linen Flax

Wood Grain

H-AE	Maple
------	-------

**Grade B**  
Premium Wood Grain

H-KA	Brazilwood
H-KG	Columbian Walnut
H-KP	Field Elm
H-KN	Grey Elm
H-KM	Landmark Wood
H-KL	Neo Walnut
H-KC	New Age Oak
H-KR	Phantom Ecru
H-KS	Phantom Pearl
H-KD	River Cherry
H-KF	Williamsburg Cherry

**Grade E**  
Premium

H-C1	Hay
H-C2	Drift
H-C3	Pecan
H-C4	Molasses
H-C5	Mineral
H-C6	Hatch
H-C7	Tanned

## Edgeband

Solid Color

HP-34	Beige
HP-AK	Chalk
HP-8J	Charcoal
HP-3J	Graphite
HP-62	Gray Tone
HP-WL	Linen
HP-3P	Platinum
HP-AA	Putty
HP-3E	Smoke

Patterned Edgeband

HP-P1	Linen Casual
HP-P2	Linen Classic
HP-P3	Linen Crisp
HP-P4	Linen Flax

Wood Grain

HP-KA	Brazilwood
HP-KG	Columbian Walnut
HP-KP	Field Elm
HP-KN	Grey Elm
HP-KM	Landmark Wood
HP-AE	Maple
HP-KL	Neo Walnut
HP-KC	New Age Oak
HP-KR	Phantom Ecru
HP-KS	Phantom Pearl
HP-KD	River Cherry
HP-KF	Williamsburg Cherry

Ply-Edge

HP-PW	Ply-Edge
-------	----------

Premium

HP-C1	Hay
HP-C2	Drift
HP-C3	Pecan
HP-C4	Molasses
HP-C5	Mineral
HP-C6	Hatch
HP-C7	Tanned

## Trim

**Grade A**  
Smooth

TR-R	Beige
TR-AK	Chalk
TR-K	Charcoal
TR-C1	Cocoa
TR-J	Graphite
TR-G	Gray Tone
TR-AA	Putty
TR-E	Smoke
TR-PLS	Smooth Plaster
TR-FM	Snow

Textured

TR-TG	Grout
TR-TF	Pitch
TR-TW	Plaster

**Grade B**  
Smooth

TR-1C	Accent Blue
TR-1G	Blue Jay
TR-1R	Brownstone
TR-1N	Night
TR-1Q	Park
TR-RR	Rusty Red
TR-1M	Sable
TR-1J	Sky Blue

Smooth Metallic

TR-MC	Metallic Champagne
TR-MG	Metallic Gunmetal
TR-LE	Metallic Silver

Textured Metallic

TR-HE	Hellenic
-------	----------

**ALERT:** These materials are current, however they are being considered for future obsolescence due to low volume.

**Wood:**

WL-RL	Beachwood
VJ-W42	Brindle
2R-RL	Butternut
NP-W08	Golden
NP-W07	Light
NX-U	Medium
VJ-W05	Natural
VR-W12	Naturally Walnut
VP-AD	Sand
WC-RW	Wenge

**Laminate:**

H-AM	Amber Cherry
H-AD	Medium Cherry

**Edgeband:**

HP-AM	Amber Cherry
HP-AD	Medium Cherry

**Trims:**

TR-1E	Accent Orange
TR-1F	Accent Red
TR-AR	Argent
TR-CTS	Chartreuse
TR-DM	Dark Bronze Metallic
TR-1H	Terra
TR-1K	Wren

**Forest Stewardship Council® (FSC®) Statement:** In our continuing support of sustainable forestry and responsible purchasing, Haworth North America is offering FSC certified wood products at no up-charge. By providing FSC certified material, Haworth is supporting our client's green building goals and demonstrating our collective commitment to source materials more sustainably.

Haworth will provide to you the necessary FSC-certified paperwork with your shipment. For more information, FAQs, and a complete FSC product list (including product exceptions), go to the Library and search FSC.

Haworth FSC Trademark License  
#FSC-C002821

# Vertical Fabrics/Color Legend

**Grade A**

- Chevron (6X)
- Etch (35)
- Highlands (L6)
- Striae (C1)
- Tailored (PY)
- Tellure (3A)

**Grade B**

- Camp (33)
- Classic (L5)
- Fields (34)
- Hue (6)
- Peca (32)
- Ritz (PV)
- Shimmer (WS)

**Grade C**

- Birds Nest (PH)
- Sisal (SW)
- Thorman (4S)

**ALERT:** These materials are current, however they are being considered for future obsolescence due to low volume.

**Grade D**

Tangram (LV)

**Haworth+**

For information on the Haworth+ alliance program, including images and product availability, please refer to: [Haworth.com](http://Haworth.com) > Surface Collection > Haworth+ Library

**Customer's Own Material (COM)**

For general Customer's Own Material (COM) information including processes and forms, please refer to: [Haworth.com](http://Haworth.com) > Surface Collection > Resources > COM  
 For information on approved COM's, please refer to: [Haworth.com](http://Haworth.com) > Surface Collection > COM Library

\* For most current finish and fabric availability please reference [surfaces.haworth.com](http://surfaces.haworth.com).

# Index

Products are listed alphabetically in this index by alpha-numeric prefix/suffix codes.

<b>Product Code</b>	<b>Product Description</b>	<b>Page</b>
4TEB-1	Electrical Components – Base Feed Module Hardwire Connection	.22
4TEB-15	Electrical Components – Single Circuit Base Feed – Receptacle Connection — 3-Circuit and 4-Circuit	.22
4TEB-20	Electrical Components – Single Circuit Base Feed – Receptacle Connection with Power Cord — 3-Circuit and 4-Circuit	.22
BABD	Accessories – Accessory Rail Mounting Bracket Kit, Double Sided	.20
EBEC-0000-F	Accessories – 120° Infeed Cover	.20
EKEP-0000-C	Electrical Components – Hardwire Kit	.28
EKET-C000-2S	Electrical Components – Top Feed	.25
EKET-C000-3S	Electrical Components – Top Feed	.25
EKET-C000-4S	Electrical Components – Top Feed	.25
EKET-C000-CS	Electrical Components – Top Feed — Hardwire	.28
EUAC-0000-A	Electrical Accessories – Base Feed Cover — Vertical	.29
EUAC-0000-F	Electrical Accessories – Base Feed Cover — Vertical	.29
EUAP-0000-CB	Electrical Components – Cover Plates	.28
EUAP-0000-CR	Electrical Components – Cover Plates	.28
EUEB-0000-2HY	Electrical Components – Base Feed Module — Hardwire Connection	.21
EUEB-0000-3HY	Electrical Components – Base Feed Module — Hardwire Connection	.21
EUEB-0000-4HY	Electrical Components – Base Feed Module — Hardwire Connection	.21
EUEC-0000	Accessories – Double-Sided Utility Tray End Covers	.20
EUEH-0087-2	Electrical Components – Infeed Harness	.21
EUEH-0087-3	Electrical Components – Infeed Harness	.21
EUEH-0087-4	Electrical Components – Infeed Harness	.21
EUEJ-0024-3	Electrical Components – Jumper	.23
EUEJ-0024-4	Electrical Components – Jumper	.23
EUEJ-0064-2WF	Electrical Components – Internal Power Base™ AI Base Feed	.23
EUEJ-0064-3WF	Electrical Components – Internal Power Base™ AI Base Feed	.23
EUEJ-0064-4WF	Electrical Components – Internal Power Base™ AI Base Feed	.23
EUEK-2S	Electrical Components – Utility Tray Power Retrofit Kit	.24
EUEK-3S	Electrical Components – Utility Tray Power Retrofit Kit	.24
EUEK-4S	Electrical Components – Utility Tray Power Retrofit Kit	.24
EUER-15	– Triplex Receptacle – 15 Amp	.26
EUER-20	– Triplex Receptacle – 20 Amp	.27
WBCZ-S	Worksurfaces – Corner, 120° Wrap-Around	.19
WBDA-SC	Worksurfaces – Rectangular Bench End Worksurface	.17
WBRA-SC	Worksurfaces – Rectangular Worksurface — No Access Hatch	.15
WBRA-SS	Worksurfaces – Rectangular Worksurface – For Use with Access Hatches	.16
WBRB-SC	Worksurfaces – Rectangular Return Worksurface	.18
ZBA2-0000-PNFG	Leg Kits – Bench End Leg Kit	.14
ZBA2-0024-HRFG	Leg Kits – Return Leg Kit	.14
ZBBP-0000-PN	Accessories – Tie Plate	.20
ZBCZ-2442-SAGH	120° Single Sided Starter Kits – 120° Single Sided Starter Kit	.11
ZBCZ-2442-SIGH	120° Single Sided Starter Kits – 120° Single Sided Starter Kit	.11
ZBCZ-4842-AWGH	120° Double Sided Three Pack Add-on Kit – 120° Double Sided Three Pack Add-on Kit	.13
ZBCZ-4842-AXGH	120° Double Sided Three Pack Add-on Kit – 120° Double Sided Three Pack Add-on Kit	.13
ZBCZ-4842-AYGH	120° Double Sided Three Pack Add-on Kit – 120° Double Sided Three Pack Add-on Kit	.13
ZBCZ-4842-AZGH	120° Double Sided Three Pack Add-on Kit – 120° Double Sided Three Pack Add-on Kit	.13
ZBCZ-4842-SAGH	120° Double Sided Three Pack Starter Kit – 120° Double Sided Three Pack Starter Kit	.12
ZBCZ-4842-SIGH	120° Double Sided Three Pack Starter Kit – 120° Double Sided Three Pack Starter Kit	.12
ZBE2-0000-PNFG	Leg Kits – Bench End Leg Kit	.14
ZBI2-0030-HNFG	Leg Kits – Return Leg Kit	.14
ZBRA-0000-D	Accessories – Access Hatch Gap Filler	.20
ZBRA-2448-ASGH	Single Sided Kits – Single Sided Add-On Kit	.8



**Index**


---

<b><u>Product Code</u></b>	<b><u>Product Description</u></b>	<b><u>Page</u></b>
ZBRA-2448-ATGH	Single Sided Kits – Single Sided Add-On Kit .....	.8
ZBRA-2448-SAGH	Single Sided Kits – Single Sided Starter Kit .....	.7
ZBRA-2448-SIGH	Single Sided Kits – Single Sided Starter Kit .....	.7
ZBRA-4848-AFGH	Double Sided Kits – Double Sided Add-On Kit .....	.10
ZBRA-4848-ASGH	Double Sided Kits – Double Sided Add-On Kit .....	.10
ZBRA-4848-ATGH	Double Sided Kits – Double Sided Add-On Kit .....	.10
ZBRA-4848-SAGH	Double Sided Kits – Double Sided Starter Kit .....	.9
ZBRA-4848-SIGH	Double Sided Kits – Double Sided Starter Kit .....	.9

## Product Compatibility and Limited Warranty Policy

### Great Expectations

You have them as a Haworth customer and so do we. And because we value our customers, we cover our products with the Haworth North America Product Compatibility and Limited Warranty Policy.

### Our Commitment To Product Compatibility – Integrated Product Platforms

As a market leader in the design and manufacture of workspaces that adapt to change, we strive to maintain product compatibility within our various generations of integrated product platforms. This benefits the customer who desires to update or modify their work environment. It also benefits the customer needing to replace a product due to damage or other reasons but which is no longer manufactured or is otherwise unavailable, such as a fabric or finish that is discontinued because of changing market preferences. In both circumstances, we often can provide products with comparable function and performance.

### Our Commitment To Product Quality – The Haworth North America Limited Warranty

To ensure customer satisfaction and peace of mind, we stand behind our products with the Haworth North America Limited Warranty. To review the current version of the limited warranty including its terms and conditions, please go to:

**[www.haworth.com/warranty](http://www.haworth.com/warranty) or contact [OneTouch@Haworth.com](mailto:OneTouch@Haworth.com) or 1 877 429 6784.**

### Warranty Requests or Questions

For questions or service requests pertaining to the Haworth Limited Warranty, please contact your Haworth dealer.

If you are unsure who your dealer is, please contact **[OneTouch@Haworth.com](mailto:OneTouch@Haworth.com) or 1 877 429 6784.**

**Effective: September 1, 2021**

## Terms of Sale

The Terms of Sale apply to all products in the North America Price Lists. To review the current version of the North American Terms of Sale, please go to:

**[www.haworth.com/terms-of-sale](http://www.haworth.com/terms-of-sale) or contact [OneTouch@Haworth.com](mailto:OneTouch@Haworth.com) or 1 877 429 6784.**

**Effective: September 2, 2022**

HAWORTH®

HAWORTH® is a registered trademark of Haworth, Inc.  
© Haworth, Inc. All rights reserved. 2023 2.23 | Item #LIT21018  
haworth.com | 800 344 2600